



Features

- Advanced new Dual Concentric driver design utilizing Omnimagnet technology
- Torus Ogive Waveguide device for improved broadband directivity
- Improved time alignment and phase coherence, delivering even better sonic performance
- High power and high sensitivity with extended frequency response and very low distortion
- Improved LF performance for applications where genuine bottom-end is a must
- Low insertion-loss, 60 watt line transformer for a more powerful and dynamic performance
- Convenient front-tapping switch for settings
- Magnetically-adhering grille system for easy custom painting and optional Arco designer grilles for minimal architectural impact
- Three-clamp, self-aligning mounting system
- UV/weather resistant UL94V-0 ABS construction for structural integrity
- Packaged with classic grille, tile rails and C-ring for quick and easy installation and simple stocking logistics
- Five year warranty

Applications

- Voice Alarm Systems
- Multizone Foreground Music & Paging Systems
- Boardrooms & Offices
- Business Music Systems
- Airports, Convention Centres, Hotels
- Reception / Waiting Rooms
- Houses of Worship
- Retail Outlets / Shopping Malls
- Lounges / Bars
- Cruise Ships
- Courtrooms

Product description

The Tannoy CMS 803DC is a full bandwidth, high power-handling and high sensitivity loudspeaker built around CMS 3.0 – the third generation of Tannoy’s revolutionary Ceiling Monitor System technology. Based on an all-new evolution of Tannoy’s proprietary Dual Concentric point-source driver, the CMS 803DC has been fundamentally re-engineered to deliver wider and more consistent broadband directivity, even greater intelligibility, and a more accurate and linear response.

The new Dual Concentric driver design features revolutionary Omnimagnet™ technology and unique patent-pending Torus Ogive Waveguide™ device, together providing more consistent and controlled directivity along with improved high frequency response. Improved time-alignment and greater coherence between LF and HF results in a wider sweet spot for enhanced performance both on- and off-axis. The re-designed baffle provides a subtle extension to the waveguide effect for additional sonic benefits.







The CMS 803DC also features extra clamp extension to accommodate thicker ceiling panels, and a locking design that prevents inadvertent over-screwing. Magnetic grille attachment enables easy removal and fitting for custom painting and tapping changes with grilles now available as either traditional style (inset in bezel) or new Arco™ style which conceals the entire unit for more architect-friendly aesthetic appeal.

The CMS 803DC utilizes a 16 ohm driver, making it ideal for use in high performance low-impedance systems (with optimized performance when used in conjunction with Lab.gruppen LUCIA amplifiers). A low-insertion loss 60 W transformer is included, with convenient front bezel switching for taps at 60 W, 30 W and 15 W, with an additional 7.5 W tap for traditional constant voltage systems.


The CMS 803DC is available in two variants. The BM (Blind Mount) version is supplied with an integral back-can, ready to install as a single unit, while the CMS 803DC PI (Pre-Install) is supplied without a back-can (separate back-can available). The zinc plated steel back-cans have an integrated, recessed termination box. The removable locking connector has screw terminals for secure wire termination and loop-thru facility. Strain relief is provided by a clamping mechanism for use with plenum-rated cable or conduit, while the new design’s spring-loaded and self-aligning clamps make for even quicker and easier installation. All models are supplied with classic grille, two tile support rails and one C-ring; Arco grille and plaster (mud) ring are available as optional accessories.

Physical data

Bezel diameter:	319.0 mm (12.56")	Hole Cutout Diameter:	295.0 mm (11.61")
BM Model:		PI Model:	
Front of ceiling to rear of backcan	310.5 mm (12.22")	Front of ceiling surface to rear of speaker unit	125.6 mm (4.94")
Front of ceiling to top of safety loop	327.7 mm (12.90")	Front of accessory backcan bezel to top of safety loop	168.5 mm (6.63")




1 m on-axis Frequency Response

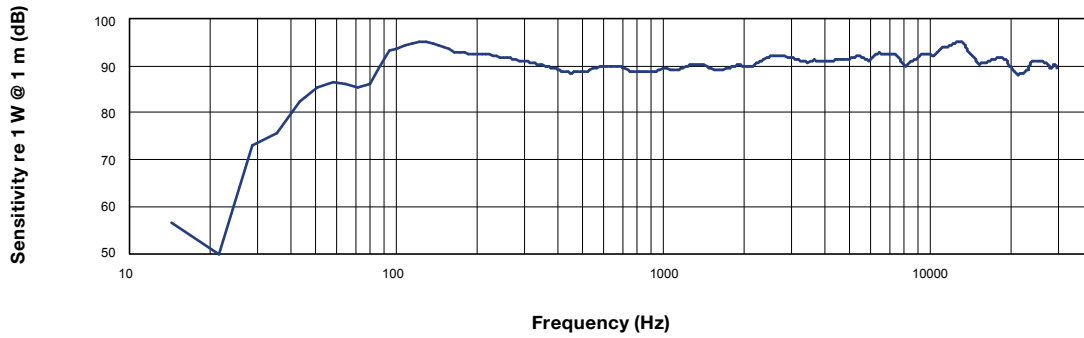


Anechoic Frequency Response

Impedance vs frequency

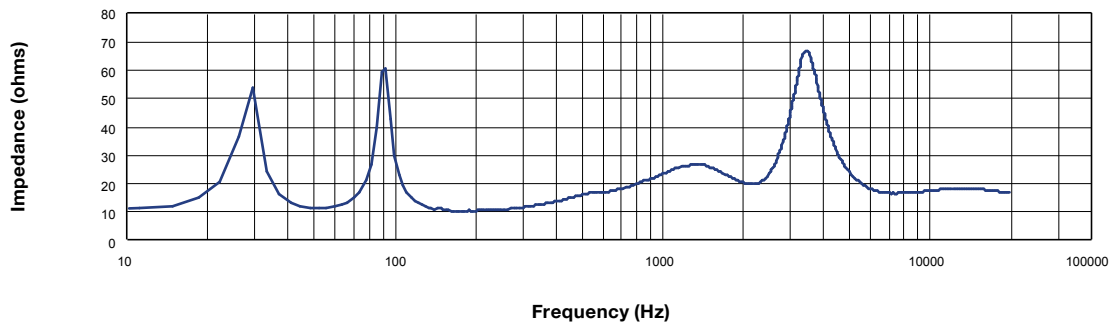


Impedance

Off-axis Frequency Response

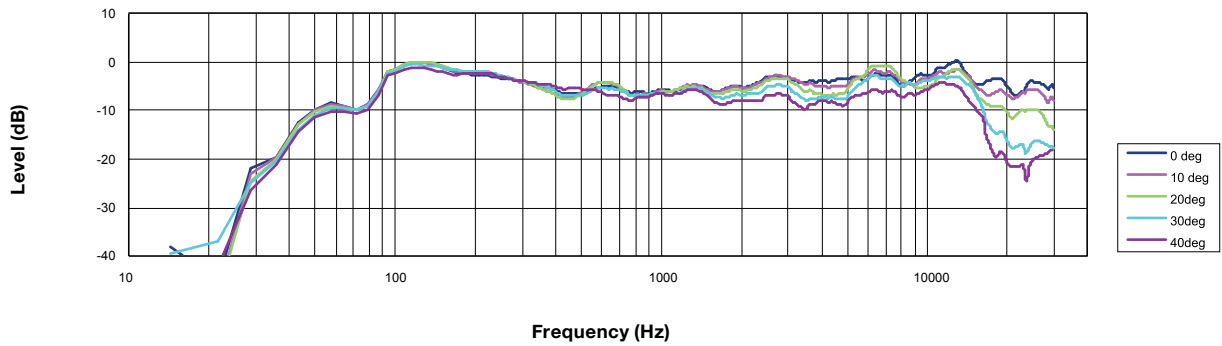


Off Axis Response

Beamwidth vs Frequency

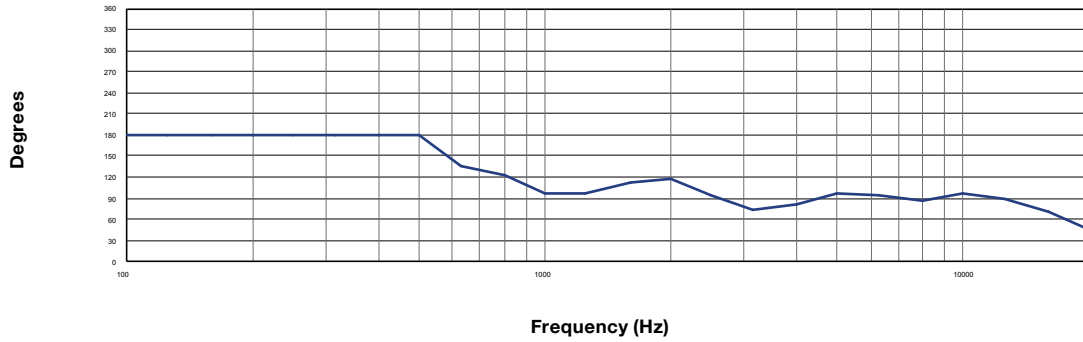

Beamwidth

Directivity Index (DI)






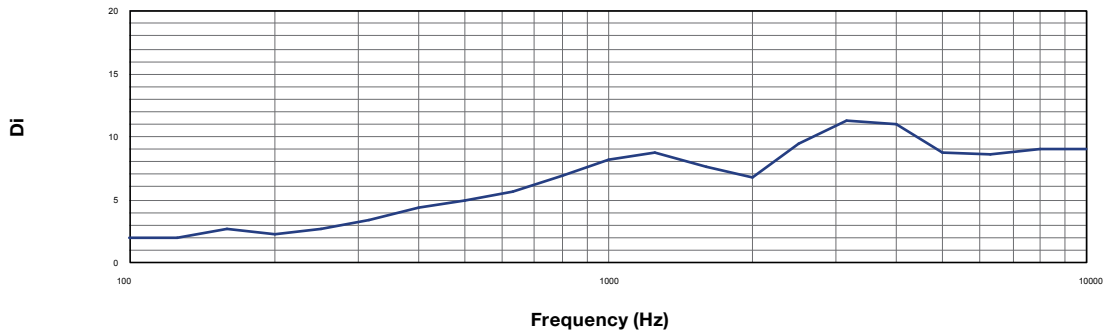


Directivity Index

Technical Data Sheet

Polar plots (1/3 octave)

CMS 803DC

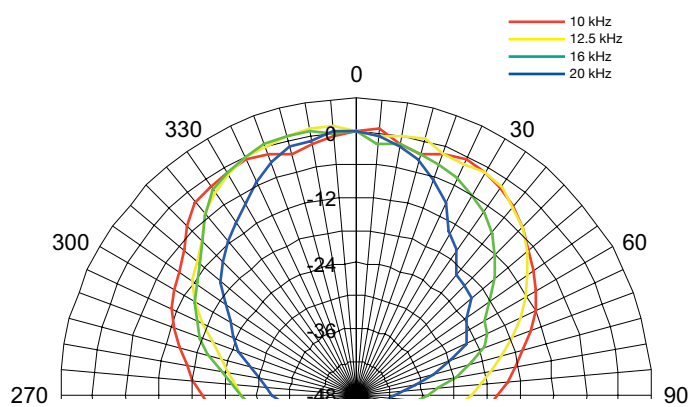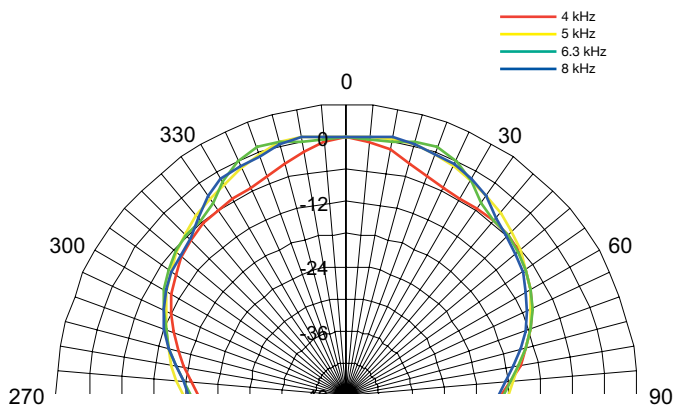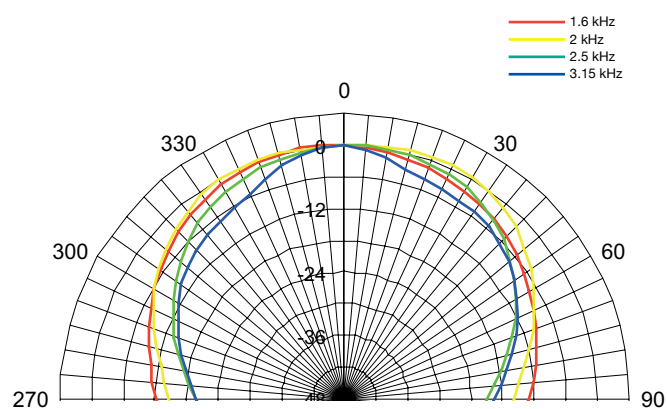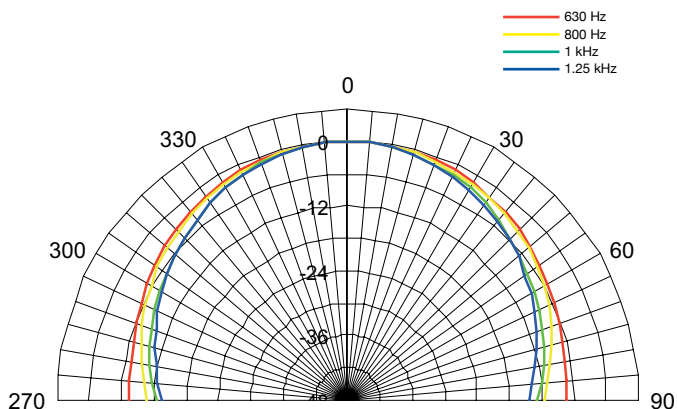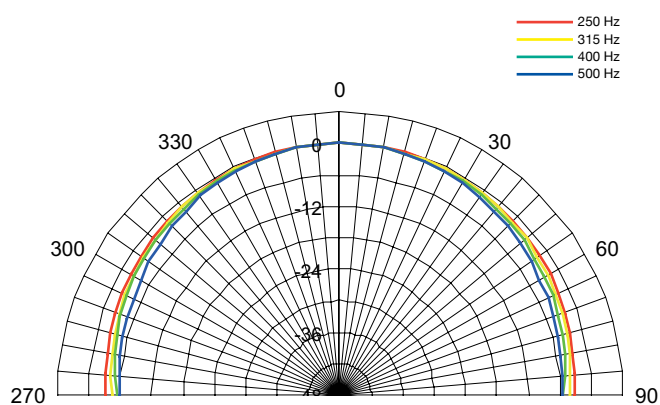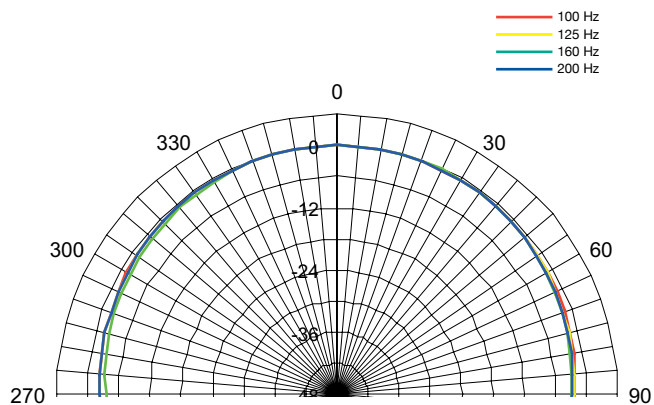

Technical Data Sheet

Specifications

CMS 803DC

Performance

Frequency response (-3 dB) ⁽¹⁾ BM Backcan	47 Hz - 30 kHz
Frequency range (-10 dB) ⁽¹⁾ BM Backcan	40 Hz - 35 kHz
Frequency range (-10 dB) ⁽¹⁾ PI Backcan	41 Hz - 35 kHz
System sensitivity (1 W @ 1 m) ⁽²⁾	92 dB (1 W = 4 V for 16 Ohms)
Nominal Coverage Angle	90 degrees conical
Power Handling ⁽³⁾	
Average	90 W
Programme	180 W
Peak	360 W
Recommended Amplifier Power	180 W @ 16 ohms
Nominal Impedance (Lo, Z)	16 ohms
Rated maximum SPL	
Average	112 dB
Peak	118 dB
With THP60 - Average	110 dB
Transformer Taps (via front rotary switch)	
70 V	60 W (83 Ω) / 30 W (165 Ω) / 15 W (330 Ω) / 7.5 W (660 Ω) / OFF & low impedance operation
100 V	60 W (165 Ω) / 30 W (330 Ω) / 15 W (660 Ω) / OFF & low impedance operation

Transducers

Dual Concentric point source driver	1 x 200 mm (8.0") Dual Concentric driver, using Omnimagnet technology
Low Frequency	44 mm (1.75") voice coil, treated multi fiber paper pulp cone
High Frequency	25 mm (1.00") PEI dome

Physical

Enclosure	
Backcan	Zinc plated steel
Baffle	Reflex loaded UL 94V-0 rated ABS
Grille	Steel, with weather resistant coating
Safety Features	Safety ring located at rear of enclosure for load bearing safety bond
Clamping Design	Security toggle clamp
Backcan Options	
Blind Mount (BM)	Complete with fixed backcan
Pre Install (PI)	Separate backcan for pre-installation
Cable Entry Options	Cable clamp & squeeze connector for conduit up to 22 mm
Conduit Knockouts on PI Backcan	3 Sets of horizontal positions 19 / 22 / 28 mm (0.75" / 0.87" / 1.10")
Connectors	Removable locking connector with screw terminals with "loop through" facility
Compliance	UL-1480, UL-2043, CE
Dimensions	
Bezel diameter	319.0 mm (12.56")
BM Model: Front of ceiling to rear of backcan	310.5 mm (12.22")
BM Model: Front of ceiling to top of safety loop	327.7 mm (12.90")
PI Model: Front of ceiling surface to rear of speaker unit	125.6 mm (4.94")
PI Model: Front of accessory backcan bezel to top of safety loop	168.5 mm (6.63")
Hole cutout diameter (all models)	295 mm (11.61")
Net Weight (ea)	
CMS 803DC BM	8.5 kg (18.74 lbs)
CMS 803DC PI	4.9 kg (10.80 lbs)
PI Backcan	4.0 kg (8.81 lbs)
Included Accessories	C-Ring, tile-bridge kit, paint mask, cut-out template, grille
Optional Accessories	Plaster (mud) ring
Packed Quantity	2

Ordering Information

Part Number	Colour
8001 7470 CMS 803DC BM	White / Paintable
8001 7480 CMS 803DC PI	White / Paintable
8001 4650 CMS 803 Plaster (Mud) Ring	Zinc Plated Steel
8001 7570 CMS 803 PI Backcan	Zinc Plated Steel
8001 7900 CMS 803 Arco Grille	White / Paintable



Notes:

1. Average over stated bandwidth. Measured in an IEC baffle in an Anechoic Chamber
2. Unweighted pink noise input, measured at 1 metre on axis
3. Long term power handling capacity as defined in EIA - 426B test

A full range of measurements, performance data, CLF and Ease™ Data for CMS 803DC can be downloaded from www.tannoypro.com.

Tannoy operates a policy of continuous research and development. The introduction of new materials or manufacturing methods may introduce variations in actual performance; however, actual performance always will equal or exceed the published specifications, which Tannoy reserves the right to alter without prior notice. Please verify the latest specifications when dealing with critical applications.

Copyright (c) 2014 Tannoy Limited. All rights reserved.