

SAFETY PRECAUTIONS

The possible results of incorrect use are marked by one of the two symbols—"WARNING" and "CAUTION"—depending on the imminence of the danger and the severity of the damage.



WARNING: Ignoring these warnings may cause severe injury or death as a result of incorrect operation.



CAUTION: Ignoring these cautions may cause moderate injury or property damage as a result of incorrect operation.

CAUTION

- Never disassemble or modify the device, as failures may result.
- Do not subject to extreme force and do not pull on the cable or failures may result.
- Keep the product dry and avoid exposure to extreme temperatures and humidity.

WARNING

- If water or other foreign objects enter the inside of the device, fire or electric shock may result.

- Do not attempt to modify this product. Doing so could result in personal injury and/or product failure.

This device is able to produce sound volume higher than 85 dB SPL. Please check your maximum allowed continuous noise exposure level based on your national employment protection requirements.

WARNING

LISTENING TO AUDIO AT EXCESSIVE VOLUMES CAN CAUSE PERMANENT HEARING DAMAGE. USE AS LOW A VOLUME AS POSSIBLE.

Over exposure to excessive sound levels can damage your ears resulting in permanent noise-induced hearing loss (NIHL). Please use the following guidelines established by the Occupational Safety Health Administration (OSHA) on maximum time exposure to sound pressure levels before hearing damage occurs.

90 dB SPL at 8 hours	95 dB SPL at 4 hours	100 dB SPL at 2 hours	105 dB SPL at 1 hour
110 dB SPL at ½ hour	115 dB SPL at 15 minutes	120 dB SPL Avoid or damage may occur	

BRH50M Premium Dual-Sided Broadcast Headset

The BRH50M Broadcast Headset is developed especially for on-camera use in broadcast and media production environments. Supra-aural design with replaceable earpads provides long-wearing comfort and good isolation. The dynamic, supercardioid microphone delivers natural, highly intelligible vocal reproduction, and pivots 270 degrees for left or right side wear. A variety of detachable cables enables connection to a wide range of devices for a lifetime of use.

Features

- Closed-back, supra-aural design with soft, replaceable earpads provides long-wearing comfort and good isolation


- Dynamic microphone delivers natural, highly intelligible vocal reproduction with supercardioid polar pattern and frequency response optimized for communication in loud environments
- Ergonomic, ultra-lightweight design with split-frame adjustable, padded headband for long wearing comfort
- Rigid boom microphone pivots 270 degrees for left or right side wear
- A variety of cables are available to connect to a wide range of devices
- User-replaceable cable, earpads and windscreen provided for a long product life
- Legendary Shure durability to withstand the rigors of professional use

Care and Maintenance


Clean using a soft, damp cloth.

CAUTION: Do not use cleansers that contain solvents. Keep liquid and foreign objects out of the driver openings.

Detachable Cable

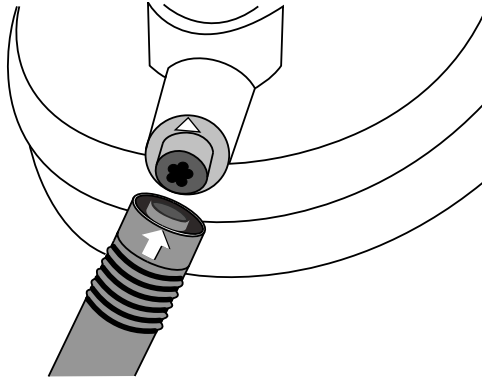


Attach the cable by aligning the arrows and pressing firmly into place until locked.

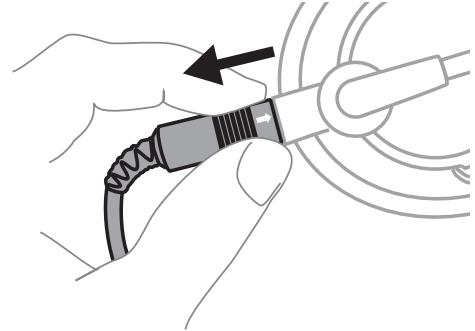


Pull on the knurled collar to disengage lock and remove cable.


Wearing the Headset

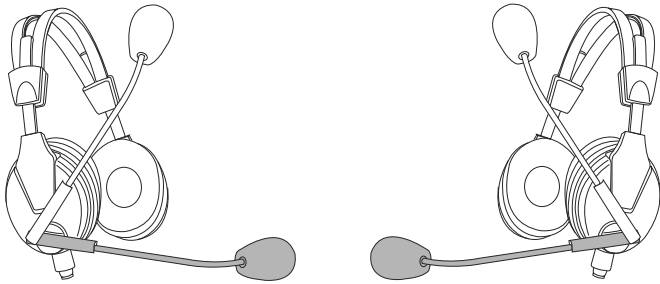


The boom swivel allows the headset to be worn with the microphone on the left or the right side.

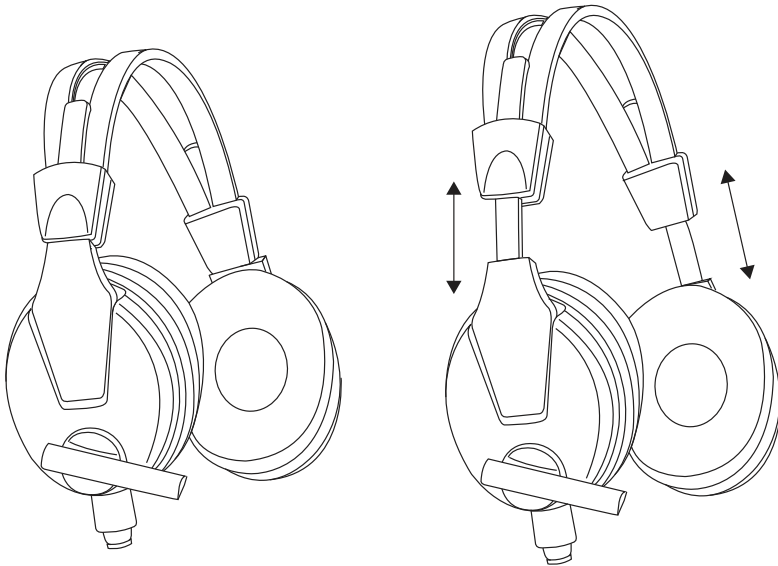



Adjust the headband for a comfortable fit.

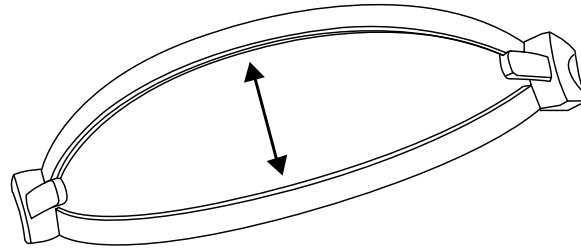

Increase headband width for additional head grip.

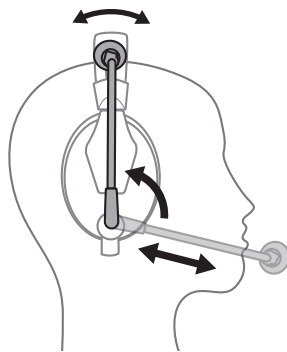

Slide the boom to position the microphone within 13 mm (1/2 inch) of the right corner of your mouth.



To avoid "popping" or other breath noise, do not place directly in front of mouth.

Replacement Parts


Replacement windscreen for BRH50M	BCAWS2
1 pair of replacement earcup pads for BRH50M	BCAEC50
Replacement cable for BRH headset - terminates to XLR3M and 1/4 in. Neutrik connectors (7.5 ft. length)	BCASCA-NXLR3QI
Replacement cable for BRH headset - terminates to XLR3M and 1/4 in. Neutrik connectors (25 ft. length)	BCASCA-NXLR3QI-25
Replacement cable for BRH headset - terminates to XLR4M Neutrik connector (7.5 ft. length)	BCASCA-NXLR4
Replacement cable for BRH headset - terminates to XLR5M Neutrik connector (7.5 ft. length)	BCASCA-NXLR5
Replacement cable for BRH headset - terminates to XLR4F Neutrik connector (7.5 ft. length)	BCASCA-NXLR4-FEM
Replacement cable for BRH headset - unterminated (bare whip) (6.5 ft. length)	BCASCA-1

Model Variations

BRH50M Dual-Sided Broadcast Headset	BRH50M
BRH50M Dual-Sided Broadcast Headset (without cable)	BRH50M-LC

BRH Broadcast Cable Accessories

The following tables describe wiring for BRH detachable cables. All BRH detachable cables contain six conductors with discrete termination at the Shure 6-pin connector that plugs into the headset. For pre-terminated cables, conductors (and signal) are tied to common contacts at the other end of the cable where shown.

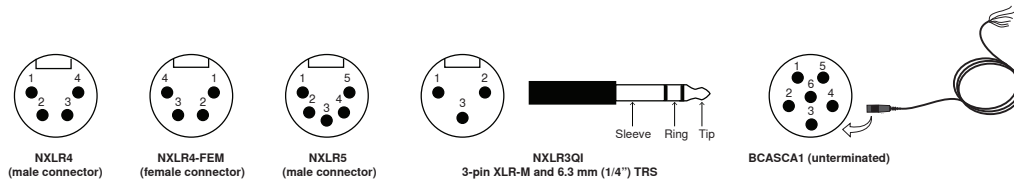

Connector Pin Diagram

4-Pin XLR-M	Signal	Wire	6-Pin Headset Connector
1	Mic -	Black	2
2	Mic +	Red	1
3	Mic Ground	Shield (uncoated)	3
	Headphone Audio Ground	White	6
4	Headphone Audio 1	Orange	4
	Headphone Audio 2 (boom side)	Green	5

4-Pin XLR-F	Signal	Wire	6-Pin Headset Connector
1	Mic -	Black	2
	Mic Ground	Shield (uncoated)	3
2	Mic +	Red	1
3	Headphone Audio Ground	White	6
4 (thru 47uF cap)	Headphone Audio 1	Orange	4
	Headphone Audio 2 (boom side)	Green	5

5-Pin XLR-M	Signal	Wire	6-Pin Headset Connector
1	Mic -	Black	2
2	Mic +	Red	1
3	Mic Ground	Shield (uncoated)	3
	Headphone Audio Ground	White	6
4	Headphone Audio 2 (boom side)	Green	5
5	Headphone Audio 1	Orange	4

Connector	Contact	Signal	Wire	6-Pin Headset Connector
3-Pin XLR-M	1	Mic Ground	Shield (uncoated)	3
	2	Mic +	Red	1
	3	Mic -	Black	2

Connector	Contact	Signal	Wire	6-Pin Headset Connector
6.3 mm (1/4") TRS	Sleeve	Headphone Audio Ground	White	6
	Tip	Headphone Audio 2 (boom side)	Green	5
	Ring	Headphone Audio 1	Orange	4

Signal	Wire	6-Pin Headset Connector
Mic +	Red	1
Mic -	Black	2
Mic Ground	Shield (uncoated)	3
Headphone Audio 1	Yellow	4
Headphone Audio 2 (boom side)	Orange	5
Headphone Audio Ground	White	6

Specifications

Weight

208 g (7.4 oz.), without cable

Environmental Conditions

Operating Temperature	18° to 60° C (0° to 140° F)
Storage Temperature	-29° to 74° C (-29° to 165° F)
Relative Humidity	0 to 95%

Microphone

Type

Dynamic, Neodymium magnet

Polar Pattern

Supercardioid

Frequency Response

40 to 16,000 Hz

Output Impedance

250 Ω

Sensitivity

at 1 kHz, open circuit voltage

-60.0 dBV/Pa* (1.0 mV)

0

Polarity

Positive pressure on diaphragm produces positive voltage on pin 1 (red wire) with respect to pin 2 (black wire).

Headphone

Transducer Type

Dynamic, Neodymium magnet

⁰ *1 Pa = 94 dB SPL

Driver Size

40 mm

Frequency Response

20 to 20,000 Hz

Sensitivity

@ 1 kHz

110 dB SPL/mW

Impedance

@ 1 kHz

300 Ω


Maximum Input Power

1000 mW

Find More Information Online

For more information, visit <http://www.shure.com>

Performance Characteristics

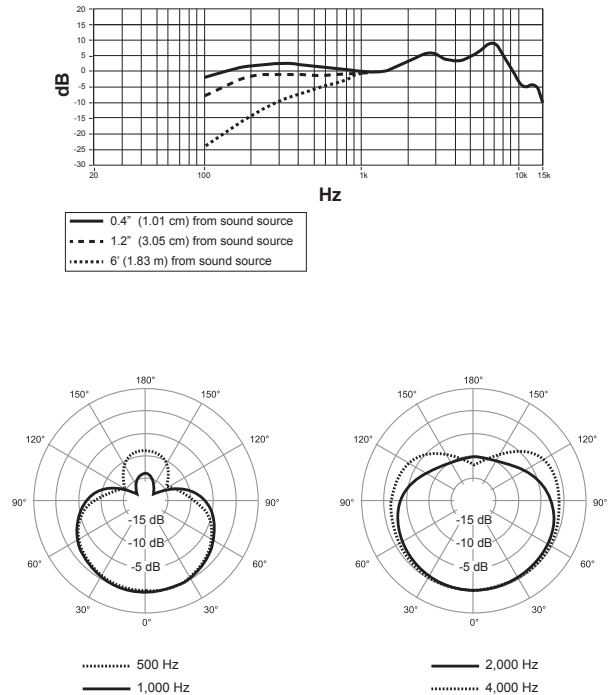

Certifications

This product meets the Essential Requirements of all relevant European directives and is eligible for CE marking.

The CE Declaration of Conformity can be obtained from:
www.shure.com/europe/compliance

Authorized European representative:
 Shure Europe GmbH

Headquarters Europe, Middle East & Africa
 Department: EMEA Approval
 Jakob-Dieffenbacher-Str. 12
 75031 Eppingen, Germany
 Phone: +49-7262-92 49 0
 Fax: +49-7262-92 49 11 4
 Email: info@shure.de

LIMITED WARRANTY

Shure Incorporated ("Shure") hereby warrants to the original consumer purchaser only that, except as otherwise specified below, this product will be free in normal use of any defects in materials and workmanship for a period of two (2) years from the consumer's original date of purchase directly from Shure or from a Shure-authorized reseller.

Any rechargeable batteries contained in or packaged with this product are so warranted for a period of one (1) year from the consumer's original date of purchase. However, rechargeable batteries are consumable and their capacity will be reduced over time based on temperature, amount of time in storage, charging cycles, and other factors; hence reduction in battery capacity does not constitute a defect in material or workmanship.

At its sole option, Shure will repair or replace the defective product and promptly return it to you. In order for this warranty to be valid, the consumer must, at the time the product is returned, provide proof of purchase in the form of the original purchase receipt directly from Shure or from a Shure-authorized reseller. If Shure elects to replace the defective product, then Shure reserves the right to replace the defective product with another product of the same model or a model of at least comparable quality and features in Shure's sole determination.

If you believe this product is defective within the warranty period, carefully repack the unit, insure it and return it with proof of purchase, postage prepaid, to Shure Incorporated, Attention: Service Department, at the address below.

Outside of the United States, return the product to your dealer or Authorized Service Center. Addresses are listed on www.Shure.com or can be obtained by contacting Shure at the address listed below.

This warranty is not transferable. This warranty does not apply in cases of abuse or misuse of the product, use contrary to Shure's instruction, ordinary wear and tear, an act of God, negligent use, purchase from a party other than Shure or a Shure-authorized reseller, unauthorized repair, or modification of the product.

ALL IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE ARE HEREBY DISCLAIMED TO THE EXTENT PERMITTED UNDER APPLICABLE LAWS AND, TO THE EXTENT NOT PERMITTED, ARE HEREBY LIMITED TO THE DURATION AND TERMS OF THIS WARRANTY. SHURE ALSO HEREBY DISCLAIMS ALL LIABILITY FOR INCIDENTAL, SPECIAL, OR CONSEQUENTIAL DAMAGES.

Some states do not allow limitations on how long an implied warranty lasts, or the exclusion or limitation of incidental or consequential damages, so the above limitation may not apply to you. This warranty gives you specific legal rights, and you may have other rights which vary from state to state.

This warranty does not restrict the rights of the consumer mandated under applicable laws.

THIS WARRANTY SUPERSEDES ALL OTHER WARRANTIES THAT ARE ASSOCIATED OR INCLUDED WITH THIS PRODUCT, EXCEPT THAT ANY

SOFTWARE CONTAINED IN OR PACKAGED WITH THIS PRODUCT IS EXCLUDED FROM THIS WARRANTY AND INSTEAD SHALL BE COVERED BY THE WARRANTY, IF ANY, PROVIDED IN SHURE'S END USER LICENSE AGREEMENT ACCOMPANYING SUCH SOFTWARE.

Service Centers

United States, Canada, Latin America, Caribbean

Shure Incorporated
Attn: Service Department
945 Chaddick Dr.
Wheeling, IL 60090-6449 U.S.A.

Europe, Middle East, and Africa

Shure Europe GmbH
Attn: Service
Jakob-Dieffenbacher-Str. 12,
75031 Eppingen, Germany

Indonesia Service Center Resmi:

Jakarta Hotline (021) 612 6388
Medan (061) 6612550
Surabaya (031) 5032219
Jogjakarta (0274) 371710
Denpasar (0361) 766788
Makasar (0411) 324652