# Roland V-02HD REMOTE Owner's Manual



V-02HD REMOTE is a dedicated iPad application for the Roland V-02HD.


Connecting the V-02HD and the iPad via USB lets you operate the V-02HD from V-02HD REMOTE.

\* V-02HD REMOTE can be used with V-02HD units that are running version 1.1 or later. Be sure to update your V-02HD unit to the latest version.

### Connecting the iPad and the V-02HD

#### **1.** Connect the V-02HD's USB port to the iPad.

Using a commercially available connection or an adaptor cable (Lightning-USB camera adaptor), connect the unit to the iPad.

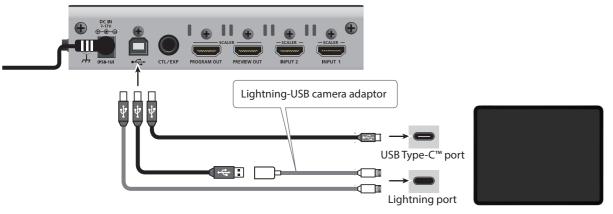

2. Turn on the power to the V-02HD.

\* Roland is an either registered trademark or trademark of Roland Corporation in the United States and/or other countries.

\* Company names and product names appearing in this document are registered trademarks or trademarks of their respective owners.


## Starting and Quitting V-02HD REMOTE

### Starting the V-02HD REMOTE

**1.** Turn on the power to the iPad on which V-02HD REMOTE is installed.



V-02HD REMOTE starts, and the V-02HD REMOTE screen appears.

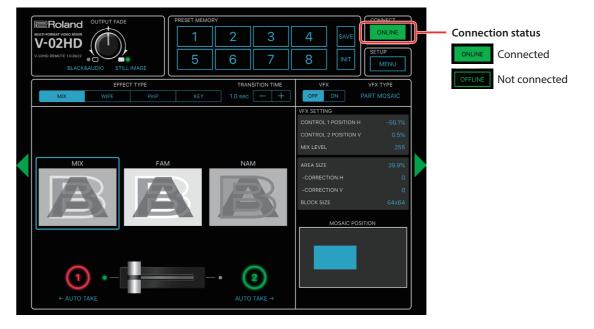

#### NOTE

If the connection status does not change to "ONLINE" (connected), re-check the connection between the iPad and the V-02HD unit.


#### Quitting

1. Press the Home button on the iPad. V-02HD REMOTE ends, and the Home screen reappears.

© 2019 Roland Corporation

### Part Names and Functions

For more details on setting items, refer to the V-02HD Reference Manual, "Menu List" (PDF).

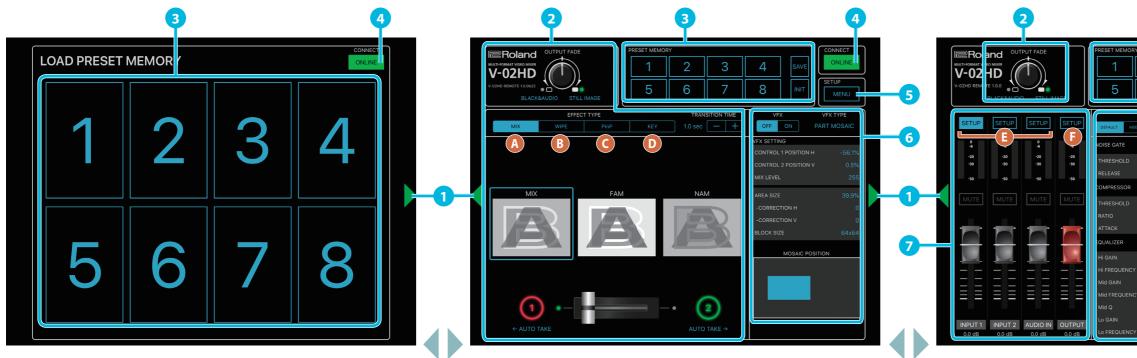

Tap the display-change button (1) to switch left or right through the screens.

No.	Name		Explanation			
1	Display-change	button	Tap the button to switch the display.			
	Operation panel		This operates the operation panel on the V-02HD by remote control.			
2			A MIX			
			C PinP	<b>D</b> КЕҮ		
	PRESET MEMORY	Memory selection buttons [1]–[8]	These buttons save the EFFECT TYPE (video switching and compositing), VFX, and audio			
			settings, so that you can recall them at any time. When you tap a memory select [1]–[8] button, the saved settings are recalled. (At this time, the selected button is lit.)			
			* The following settings are not saved in memory. Only one set of these settings are saved for the V-02HD unit.			
			PRESET MEMORY menu			
			CTL/EXP menu			
			CAPTURE IMAGE menu			
			SYSTEM menu			
		[INIT] button	If you tap the [INIT] button (making it light) and then tap a memory select [1]–[8] button, the content of the memory you tapped is initialized.			
		[SAVE] button	If you tap the [SAVE] button (making it light) and then tap a memory select [1]–[8] button, the state of the operating panel is saved to the memory you tapped.			

No. Name		Explanation	
		This displays the conn remotely control the N ONLINE Connected	
5 [MENU] button		This displays the settin Tap the [Back] button * Some of the parame	
6 VFX		Here you can edit the	
	[SETUP] button	This selects the chann	
7 Audio mixer	Level meter	These display the volu	
7 Audio mixer	[MUTE] button	This mutes (silences) t	
	Audio level faders	These adjust the volur	
		Here you can edit the [SETUP] button.	
8 Audio edit		INPUT channel	
8 Audio edit			

3			4	
2	3	<b>4</b> SA <sup>1</sup>	CONNECT ONLINE	
6	7	8	T SETUP MENU	5
EFFECT PR		WINDY FIELD 0.0frame	DELAY TIME (Omsec) - +	
OFF	ON -50.0 dB			
OFF	860 ms ON	44 46 46 46 46 46 46 46 46 46 46 46 46 4		
		RELEASE AUTO GAIN	380 ms ON	
			0.0 dB	
OFF	ON	HIGH PASS FILTER 75	Hz OFF ON	
	0.0 dB 10.0 kHz			
	0.0 dB			
	400 Hz	+		
	1.0			
	0.0 dB	100		
	100 Hz			J

nnection status of the V-02HD and iPad. If this is "ONLINE," you can e V-02HD from V-02HD REMOTE.

- OFFLINE Not connected
- tings screen of the V-02HD unit.
- n to return to the previous screen.
- neters cannot be edited from V-02HD REMOTE.
- e VFX (visual effect) settings.
- nel for which you can edit the character of the sound.
- lume levels of input/output audio.
- ) the input and output audio.
- ume level of input/output audio.
- e character of the sound. You can edit the channel that's selected by the



#### **OUTPUT channel**

