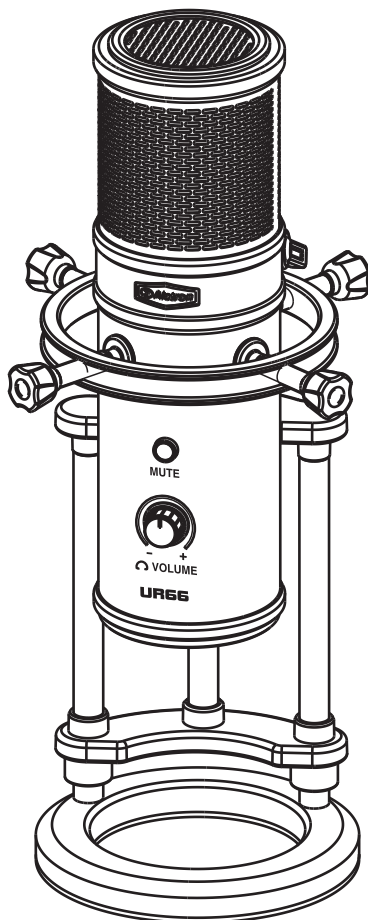


 **Alctron** 爱克创

UR66

多指向性的USB麦克风

MULTI-PATTERN USB MICROPHONE



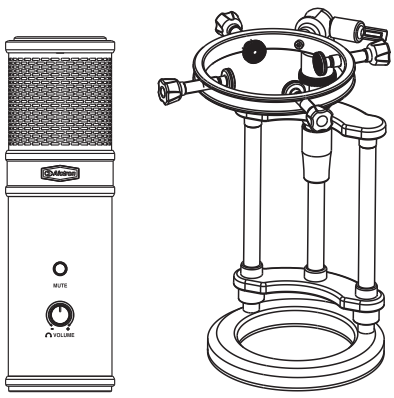
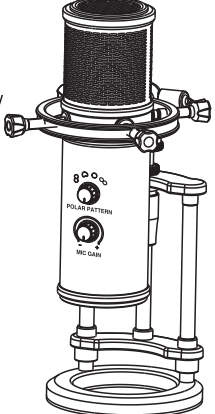
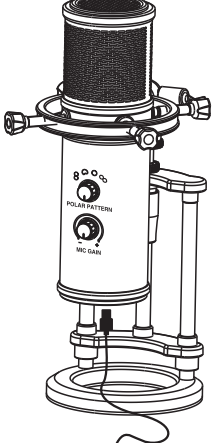
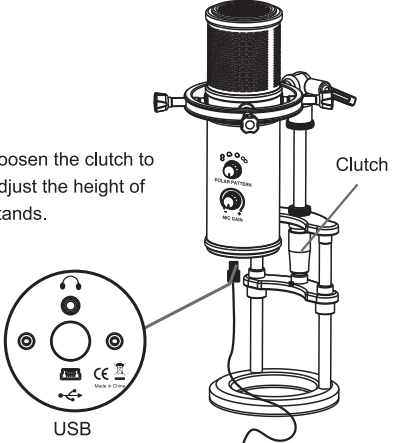
GENERAL INTRODUCTION

The UR66 is a multi-pattern USB microphone, combining 3 capsules and 4 different pattern setting. With an impressive recording resolution of 96khz/24bit, UR88 is a better choice for you whether you are new to streaming or a veteran in the field. It comes with a built-in headphone amplifier which fits for 3.5mm monitor headphone connector. Plug the headphone into microphone and drive the software for zero-latency monitoring. By using the control knobs on the shell, you are able to quickly adjust the microphone gain and headphone volume for an optimal recording and monitoring experience.


FEATURE

- * High quality recording with outstanding clarity;
- * 4 adjustable recording patterns (cardioids, stereo, omnidirectional, figure eight);
- * Built-in headphone amplifier with zero latency output;
- * USB monitoring connector;
- * The shell made by metal material, sturdy and durable.


INSTALLATION

<p>1</p>  <p>Microphone</p> <p>Mic Stand</p>	<p>2</p> <p>Loosen the thumbscrew on the mic stand, make sure that microphone in the proper position then lock the thumbscrew.</p> 
<p>3</p>  <p>Use USB cable to connect microphone and computer.</p>	<p>4</p> <p>Loosen the clutch to adjust the height of stands.</p>  <p>Clutch</p> <p>USB</p>

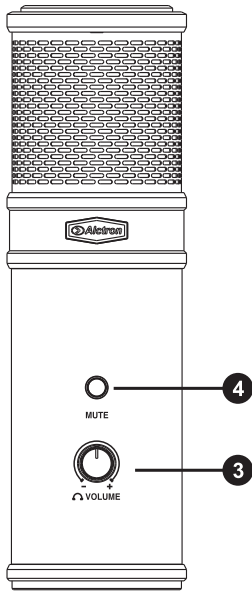
THE INTRODUCTION OF EACH BUTTON



Front side while in use

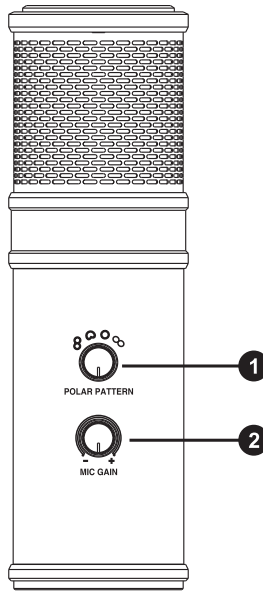


Rear side while in use

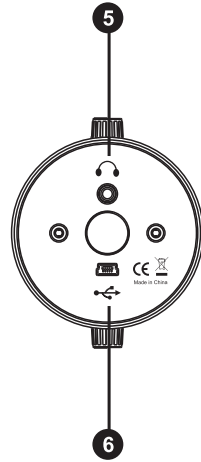

- 1. POLAR PATTERN:** switch between 4 different recording patterns with a quick turn of this knob.
- 2. MIC GAIN:** quickly adjust your microphone's sensitivity to your preferred state.
- 3. HEADPHONE VOLUME:** controls the volume level of headphones plugged into the microphone.
- 4. STUDIO MUTE:** enables you to quickly mute the microphone.
5. Standard 3.5mm headphone connector.
6. standard USB connector.

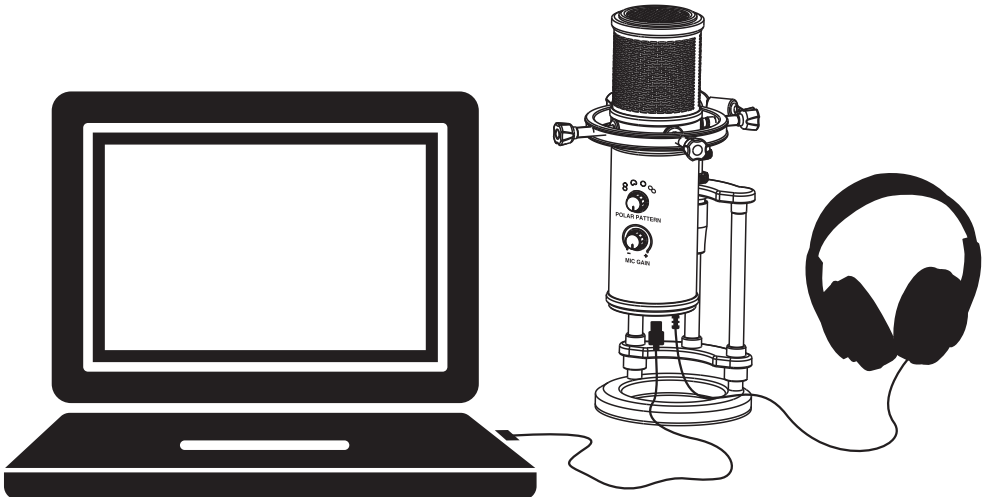CONNECTION



HOW TO USE UR66

For Windows users

Step 1: use USB cable to connect microphone and computer.

Step 2: select control panel>hardware and sound>manage audio devices to view your sound setting window.

Step 3: in the recording tab, select "Alctron Ur66" from the list and click the set default button.

For Mac users

Step 1: use USB cable to connect microphone and computer.

Step 2: select system preferences>sound to view your sound settings window.

Step 3: in the input tab, select "Alctron UR66" from the list.

▲ SAFETY PRECAUTIONS

- * Do not store the microphone under direct sunlight, near heating devices or in a hot, humid or dusty place. Do not allow the microphone to get wet;
- * Do not install near any heat sources such as radiators, heat registers, stoves, or other apparatus (including amplifiers) that produce heat;
- * Do not subject the microphone to strong impact;
- * Do not disassemble, modify or attempt to repair the microphone;
- * Clean only with dry cloth;
- * When this product is used for a long time, the microphone may become discolored due to ultraviolet light (especially direct sunlight) or wear.

SPECIFICATION

Microphone

- * Type: USB microphone
- * Capsule: 16mm electret capsule
- * Polar pattern: Cardioids, Omni, Figure-8 and stereo
- * Frequency response: 30hz-20khz
- * Sample rate: 96k
- * Bit rate: 24bit
- * Sensitivity: -32dB
- * Connector: Standard USB connector
- * Power requirement: USB power

Headphone output

- * Frequency response: 20hz-20khz
- * Sample rate: 48k
- * Bit rate: 16bit

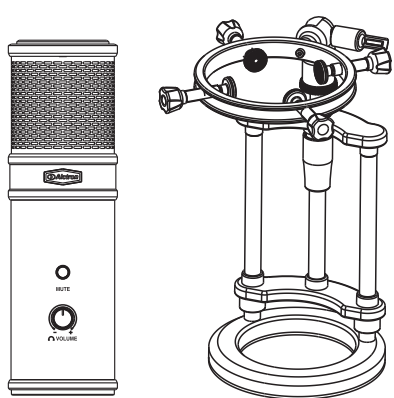
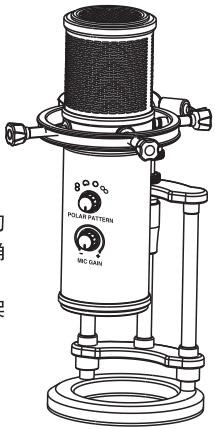
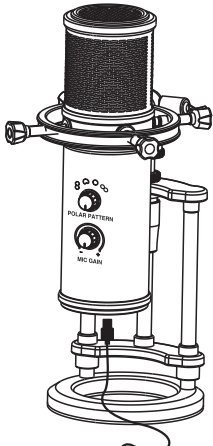
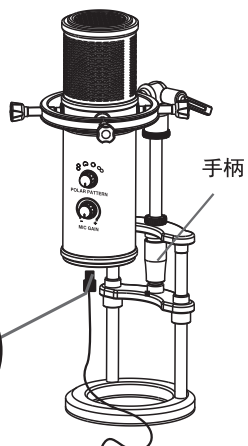
产品简介

UR66是一款多指向性的USB麦克风，有三个音头四种指向性。它支持96khz/24位录音解析度，无论您是媒体制作的新手还是经验丰富的专业人士，UR66都是您不错的选择。内置耳机放大器，适合3.5mm接口监听耳机。耳机直接插入麦克风即可实现零延迟输出，实时精准监听您的录音。使用麦克风壳身上的控制旋钮，可快速调整麦克风增益和音量，以确保高品质的录音和监听效果。


特征

- * 清晰的高清录音品质；
- * 四种可调录音模式（心型、立体声、圆型、八字型）；
- * 内置耳机放大器零延迟输出；
- * USB监听接口；
- * 壳身由金属材料打造，坚固耐用。

安装


<p>1</p>  <p>麦克风</p> <p>麦克风支架</p>	<p>2</p>  <p>拧松麦克风支架上的螺丝放入麦克风，确保麦克风放入正位，随后拧紧麦克风支架上的螺丝。</p>
<p>3</p>  <p>用USB线连接麦克风和电脑即可使用。</p>	<p>4</p>  <p>您可以通过拧松支架上的手柄来调节支架高度。</p> <p>手柄</p> <p>USB</p>

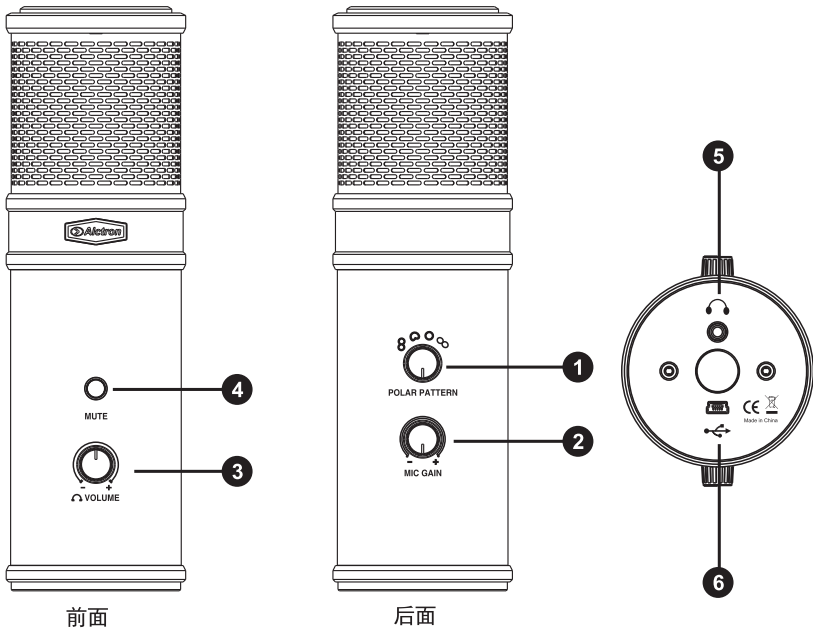各个按钮的功能介绍



1. POLAR PATTERN: 转动这个旋钮能快速的变化的指向性（4种指向性）。
2. MIC GAIN: 快速的调节您的麦克风的灵敏度使它处于适合的状态。
3. HEADPHONE VOLUME: 控制连接UR66麦克风耳机的音量。
4. STUDIO MUTE: 按下这个按键能够使麦克风处于静音的状态。
5. 3.5mm耳机插孔。
6. 标准USB接口。

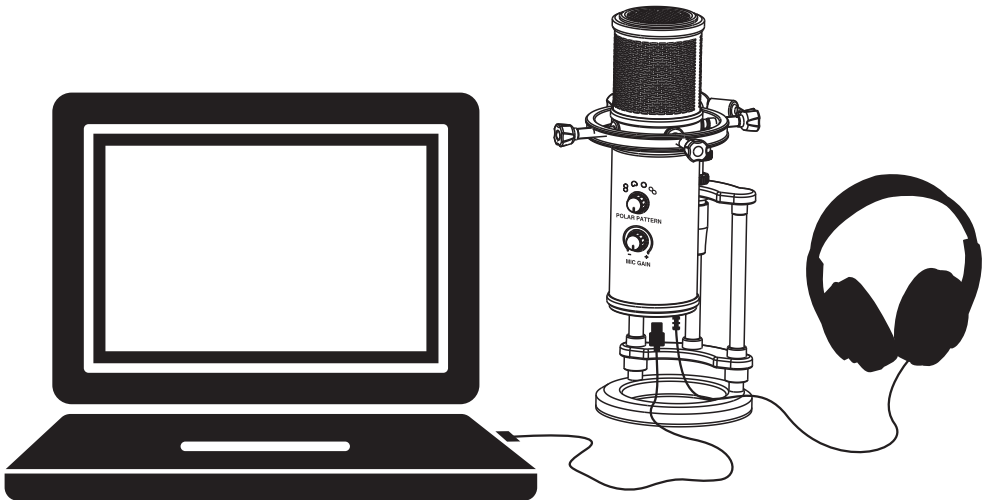连接



如何使用UR66

Windows用户

第1步：用USB线连接话筒和电脑。

第2步：从控制面板>硬件和声音>管理音频设备打开您的声音设置。

第3步：在录音选项卡，从列表选择“Alctron UR66”并单击“设为默认值”按键。

Mac用户

第1步：用USB线连接话筒和电脑。

第2步：从系统首选项>声音打开您的声音设置。

第3步：在输入选项卡中，从列表选择“Alctron Ur66”。

▲ 安全注意事项

- * 不要将麦克风存放在阳光直射下、暖气设备附近或湿热或多尘的地方。不要弄湿麦克风；
- * 请勿将本产品安装在热源附近，如暖气片，炉子或者其它产生热量的设备（包括功放器）；
- * 请勿使麦克风受到强烈撞击；
- * 请勿拆卸或改造麦克风；
- * 请用干布清洁本产品；
- * 长时间使用本产品时，麦克风部分可能会因紫外线（特别是阳光直射）或磨损而变色。

产品参数

麦克风

- * 类型：USB 麦克风
- * 音头：16mm驻极体音头
- * 指向性：心型，圆型，八字型，立体声
- * 频响：30hz-20khz
- * 采样率：96k
- * 比特率：24bit
- * 灵敏度：-32dB
- * 接口：标准USB接口
- * 电源要求：USB供电

耳机输出

- * 频响：20hz-20khz
- * 采样率：48k
- * 比特率：16bit

版权所有©宁波奥创电子科技有限公司,所有权保留。必要的技术数据和外观更改恕不予以另行通知。

宁波奥创电子科技有限公司

地址：浙江省宁波市海曙区秀丰工业区三成路76号

电话：+86 574 88009874

传真：0574-87157176 邮箱：sales@alctron-audio.com

网址：<http://www.alctron-audio.com>

全国统一服务热线：4000-160-112